

olivetti



EXPLOR@120D and 150D

VIDEO TOUCH SCREEN

EXPLOR@120D and **EXPLOR@150D** were specially designed for the **POS applications**.

They are provided with an **adjustable tilt angle** from 0 degree ~ 70 degrees, a **versatile touch screen** and a choice of 12.1" or 15" screen sizes.


Besides Power USB, Magnetic Card Reader and Customer Display Unit can be added to provide a 3C (Compact, Convenient, Complete) POS solution. **EXPLOR@120D** and **EXPLOR@150D** can be combined with the POS PC Systems **EXPLOR@200M** or **EXPLOR@300M** for a complete modular solution. Ergonomic design in touch screen and hinge for multi-purpose applications.

COMPACT, CONVENIENT, COMPLETE

A COMPLETE MODULAR SOLUTION COMBINED WITH THE POS PC SYSTEMS EXPLOR@ 200M AND EXPLOR@ 300M

ADJUSTABLE VIEW ANGLE FOR DIFFERENT ENVIRONMENTS WITH POWERED USB

MAGNETIC CARD READER AND CUSTOMER DISPLAY (OPTIONAL)

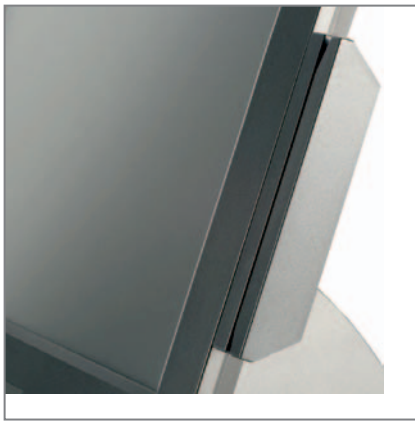

MAGNETIC CARD READER for fidelity card or operator identification (optional)



PANEL 0 - 70° tilt angle



CUSTOMER DISPLAY POLE TYPE
VFD 2 X 20 or Graphic LCD (optional)

TECHNICAL SPECIFICATIONS		EXPLOR@120D	EXPLOR@150D	
LCD / TOUCH PANEL	LCD Size	12.1" TFT	15" TFT	
	Brightness (nits)	Up to 200 cd / m ²	Up to 250 cd / m ²	
	Resolution	Max 800 x 600	Max 1024 x 768	
	Touch Screen Type	Resistive (5 wires)	Resistive (5 wires)	
	Tilt Angle	0 ~ 70 degree	0 ~ 70 degree	
EXTERNAL I / O PORTS	Front I/O	USB	2 (V2.0)	2 (V2.0)
		Power USB	1 port 2.0 (12V)	1 port 2.0 (12V)
		OSD Buttons	Power on/off, Menu, Video function adjustment, Exit	Power on/off, Menu, Video function adjustment, Exit
	Rear I/O	PS/2	2 (1 x MSR, 1 x external keyboard)	2 (1 x MSR, 1 x external keyboard)
		Seriale / COM	2 (for touch screen & MSR) input	2 (for touch screen & MSR) input
		USB	1 (V 2.0) input	1 (V 2.0) input
		Line input	1 port (optional)	1 port (optional)
DC in Jack	1	1		
ENVIRONMENT	EMC & Safety	CE Class A, LVD	CE Class A, LVD	
	Operating Temperature	0 °C ~ 35 °C	0 °C ~ 35 °C	
	Storage Temperature	-10 °C ~ 60 °C	-10 °C ~ 60 °C	
OPTIONS	Magnetic Card Reader	3 Tracks (RS-232 / PS2)	3 Tracks (RS-232 / PS2)	
	Customer Display	VFD Pole Display (2 x 20) Graphic LCD 10.4"/12.1"	VFD Pole Display (2 x 20) Graphic LCD 10.4"/12.1"	
	Internal Speakers	2 x 2 W - 1 x 3 PIN Line in Jack	2 x 2 W - 1 x 3 PIN Line in Jack	
	Power Supply/Adapter	60 W Power Adapter 12 V / 5 A, AC Input Voltage 100 - 250 Vac, range 90 -250 Vac, frequency 47 - 63 Hz	60 W Power Adapter 12 V / 5 A, AC Input Voltage 100 - 250 Vac, range 90 -250 Vac, frequency 47 - 63 Hz	
	Dimensions (WxDxH) & Weight	30.8 x 29.8 x 28.3 cm - 4.0 Kg	38.6 x 29.8 x 34.7 cm - 4.5 Kg	

Product performances are referred to an appropriate use under optimal conditions. With the right to change technical specifications. The registered trademarks are the property of their respective owners. EXPLOR@120D and EXPLOR@150D are distributed by Olivetti S.p.A. 10/06) - Codice: 5000712-01

OLIVETTI S.P.A.
VIA JERVIS 77
10015 IVREA (TO) ITALY
www.olivetti.com